Applied Precision
probeWoRx

AppliedPrecision
probeWoRx

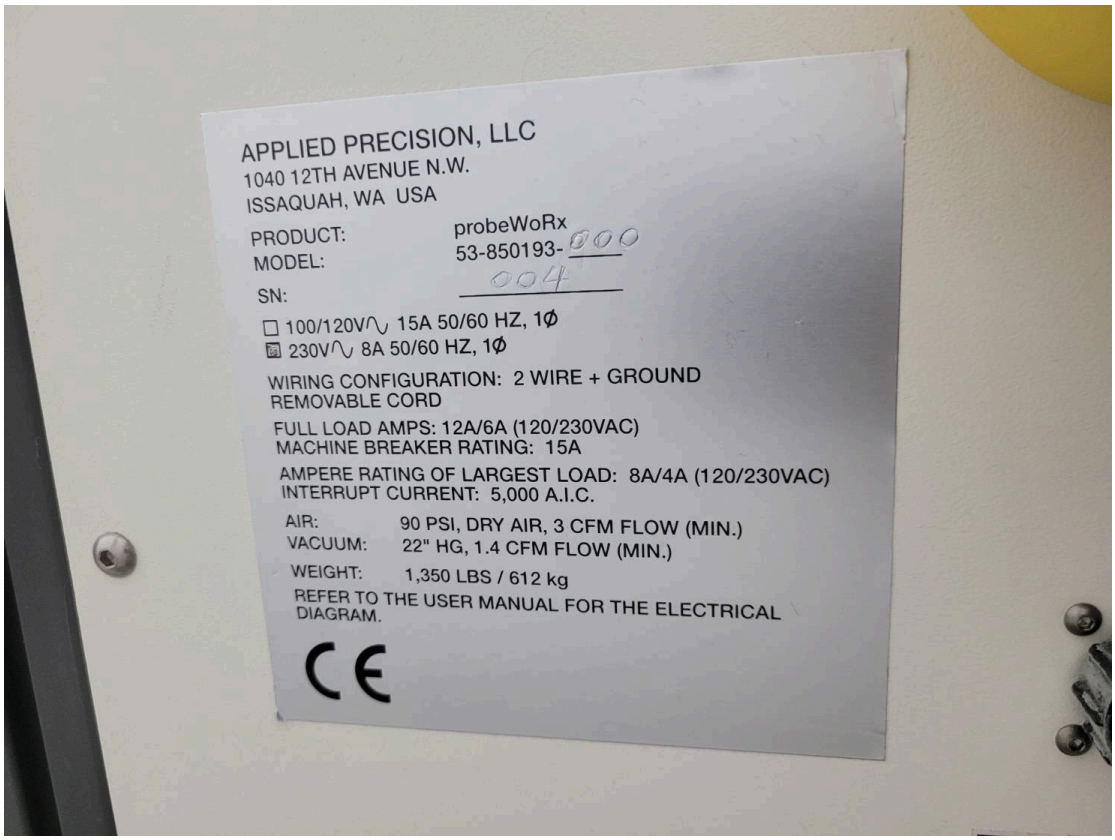
APPLIED PRECISION, LLC
1040 12TH AVENUE N.W.
ISSAQUAH, WA USA
PRODUCT: probeWoRx
MODEL: 53-850193-000
SN: 004
100/120V∿ 15A 50/60 HZ, 1Ø
230V∿ 8A 50/60 HZ, 1Ø
WIRING CONFIGURATION: 2 WIRE + GROUND
REMOVABLE CORD
FULL LOAD AMPS: 12A/6A (120/230VAC)
MACHINE BREAKER RATING: 15A
AMPERE RATING OF LARGEST LOAD: 8A/4A (120/230VAC)
INTERRUPT CURRENT: 5,000 A.I.C.
AIR: 90 PSI, DRY AIR, 3 CFM FLOW (MIN.)
VACUUM: 22" HG, 1.4 CFM FLOW (MIN.)
WEIGHT: 1,350 LBS / 612 kg
REFER TO THE USER MANUAL FOR THE ELECTRICAL DIAGRAM.
CE

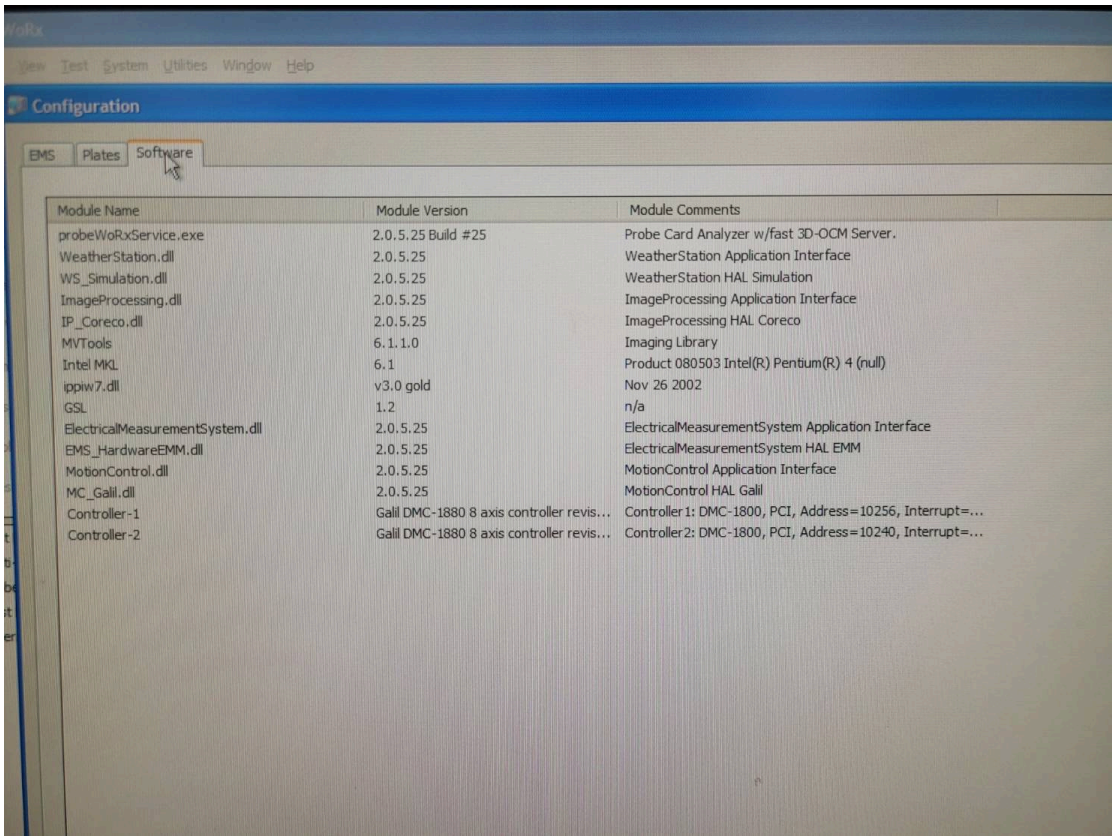

View Test System Utilities Window Help

Configuration

EMS | Plates | Software

Module Name	Module Version	Module Comments
probeWoRxService.exe	2.0.5.25 Build #25	Probe Card Analyzer w/fast 3D-OCM Server.
WeatherStation.dll	2.0.5.25	WeatherStation Application Interface
WS_Simulation.dll	2.0.5.25	WeatherStation HAL Simulation
ImageProcessing.dll	2.0.5.25	ImageProcessing Application Interface
IP_Coreco.dll	2.0.5.25	ImageProcessing HAL Coreco
MVTools	6.1.1.0	Imaging Library
Intel MKL	6.1	Product 080503 Intel(R) Pentium(R) 4 (null)
ippiw7.dll	v3.0 gold	Nov 26 2002
GSL	1.2	n/a
ElectricalMeasurementSystem.dll	2.0.5.25	ElectricalMeasurementSystem Application Interface
EMS_HardwareEMM.dll	2.0.5.25	ElectricalMeasurementSystem HAL EMM
MotionControl.dll	2.0.5.25	MotionControl Application Interface
MC_Galil.dll	2.0.5.25	MotionControl HAL Galil
Controller-1	Galil DMC-1880 8 axis controller revis...	Controller1: DMC-1800, PCI, Address=10256, Interrupt=...
Controller-2	Galil DMC-1880 8 axis controller revis...	Controller2: DMC-1800, PCI, Address=10240, Interrupt=...

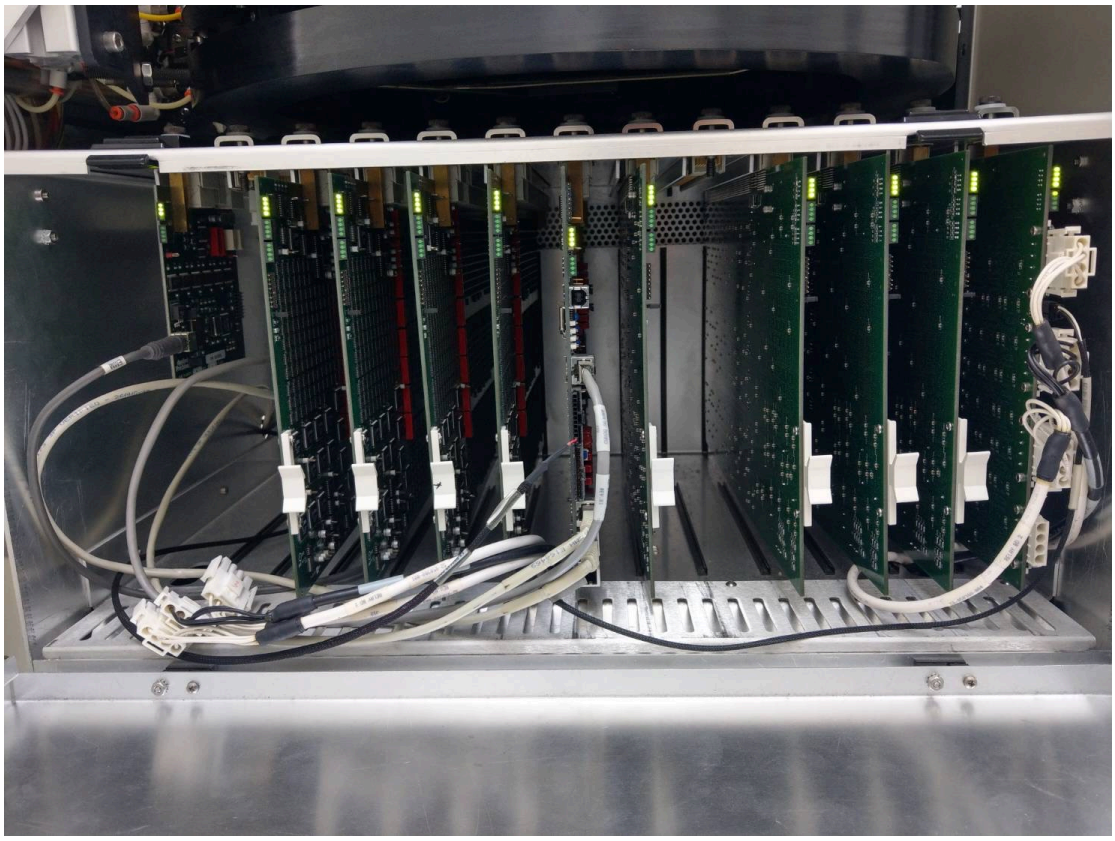

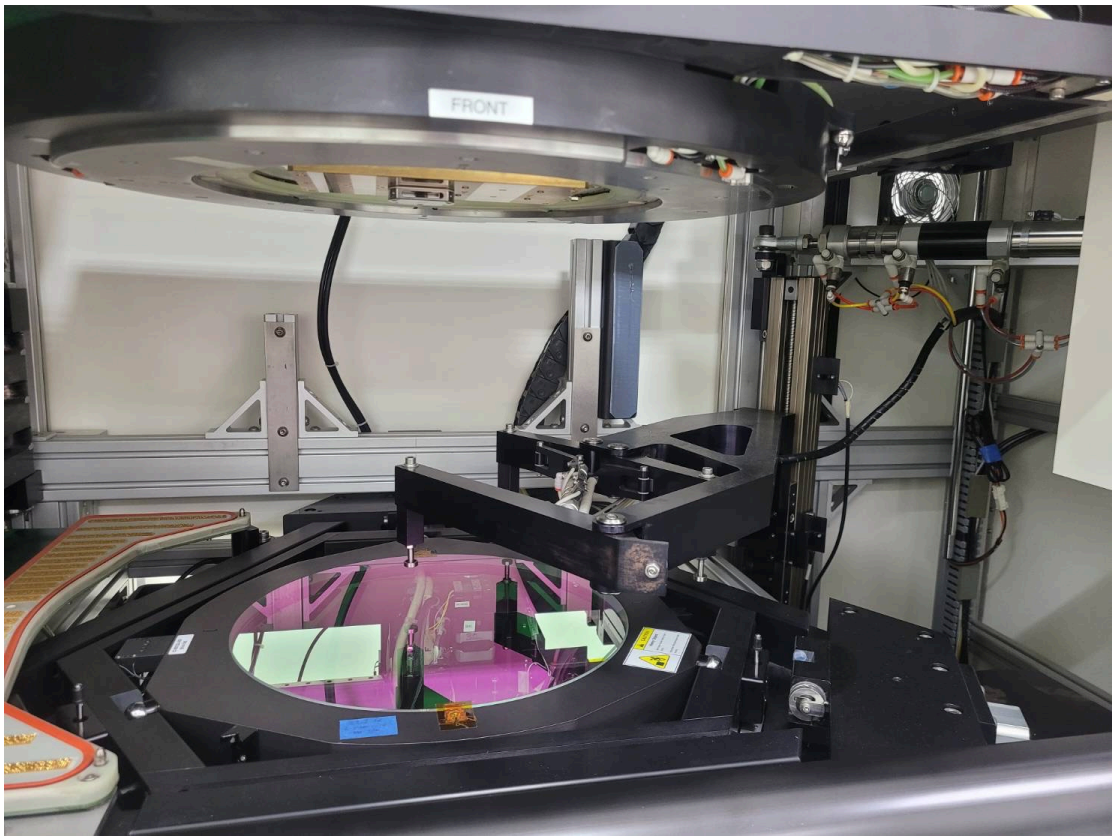
FRONT