



ASML XT1250
&
Cymer XLA 165



Vintage: 2004

Main body (ASML XT1250)

Laser (Cymer Laser XLA165)

Chiller (JW-150DCH)

MDC

LCWC

MCWC

Power rack 4 era

Air control cabinet (ACC MKIII)


Purifier (Aeronex infinity GPS-8 Z series)


Exhaust (ACC MKIII)







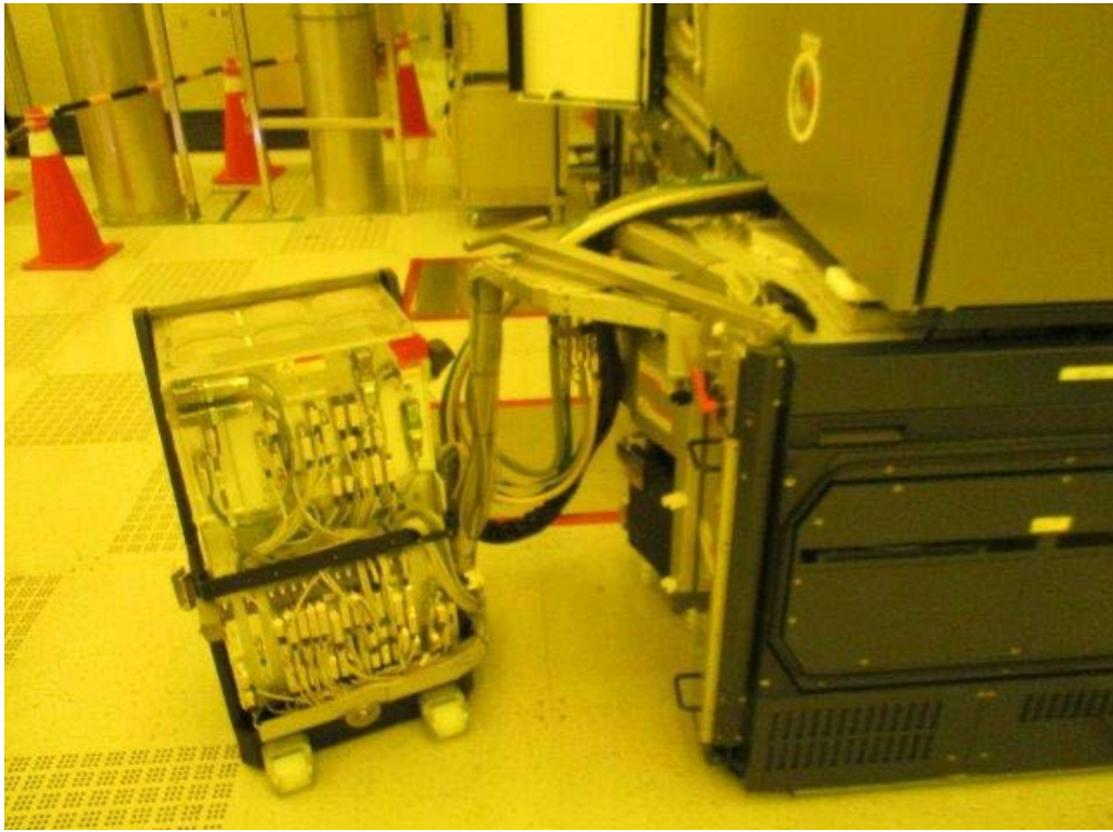

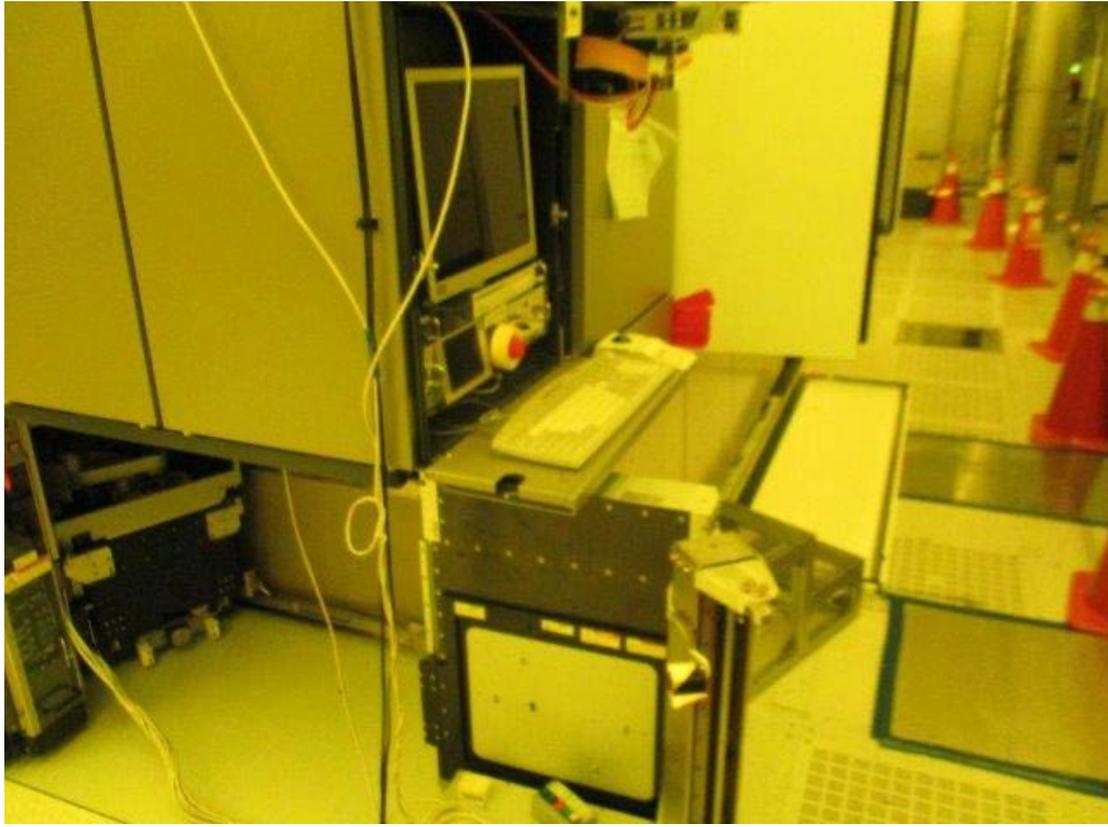















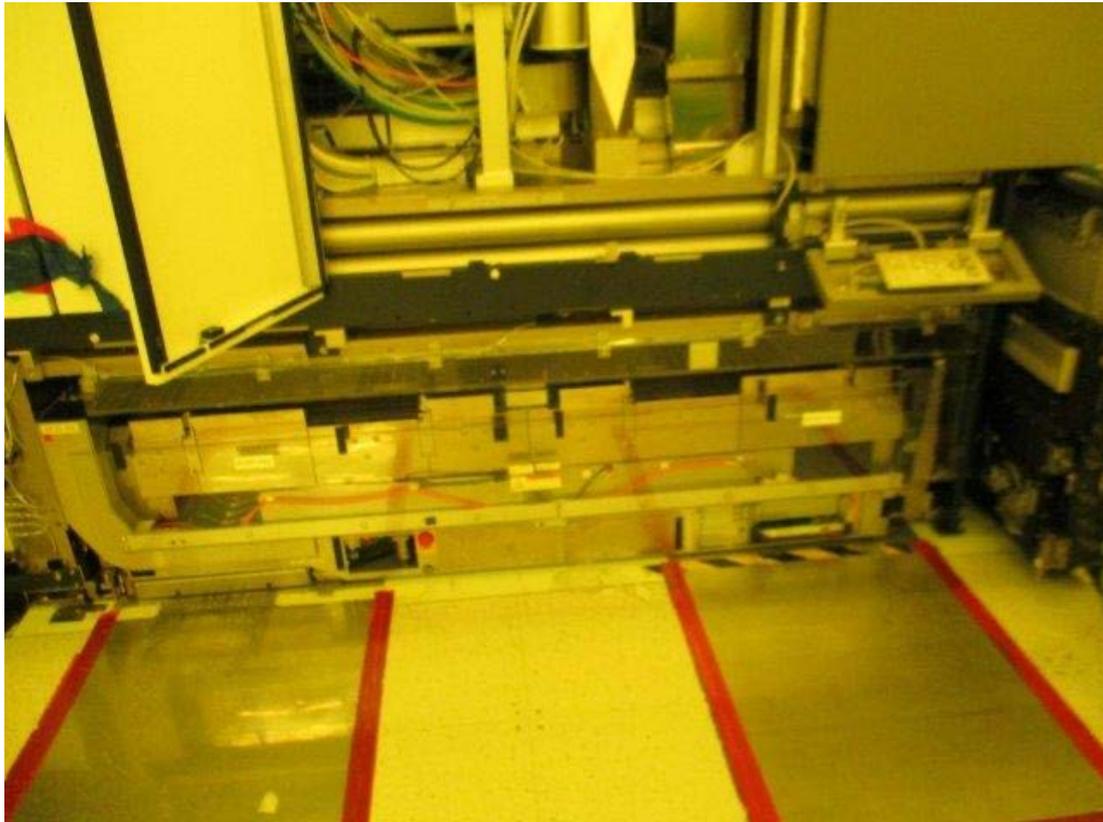




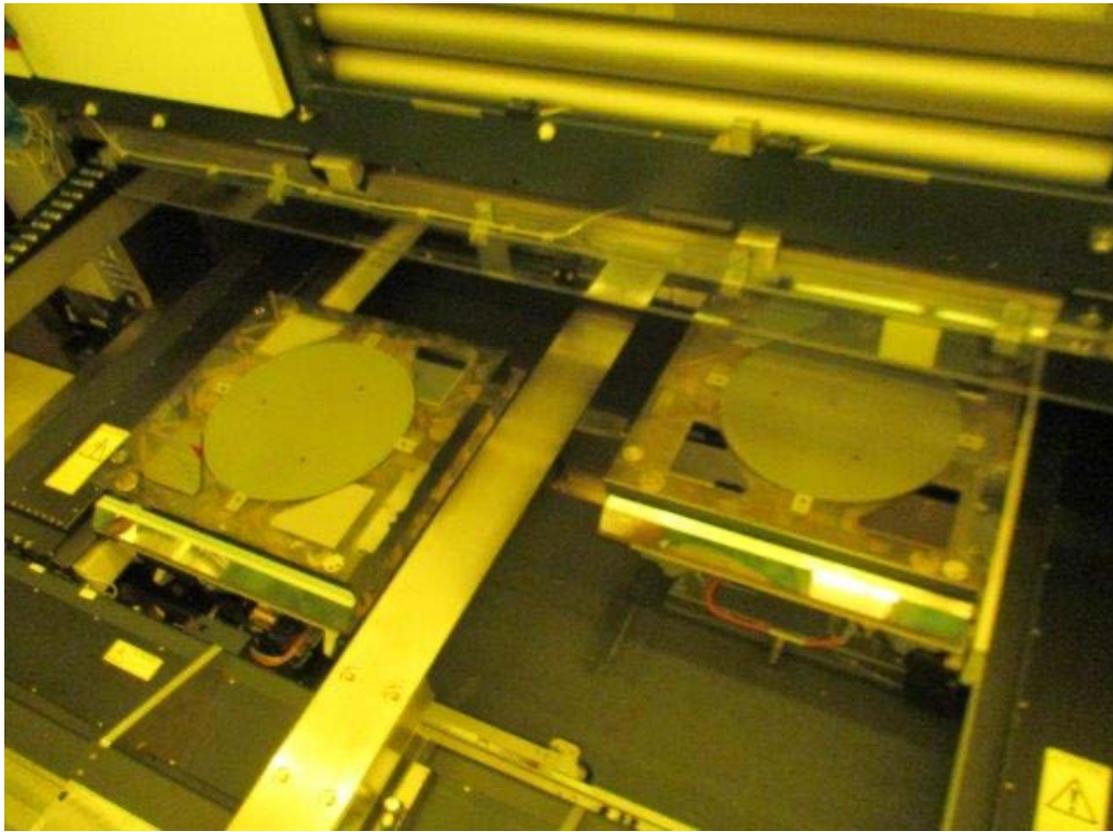

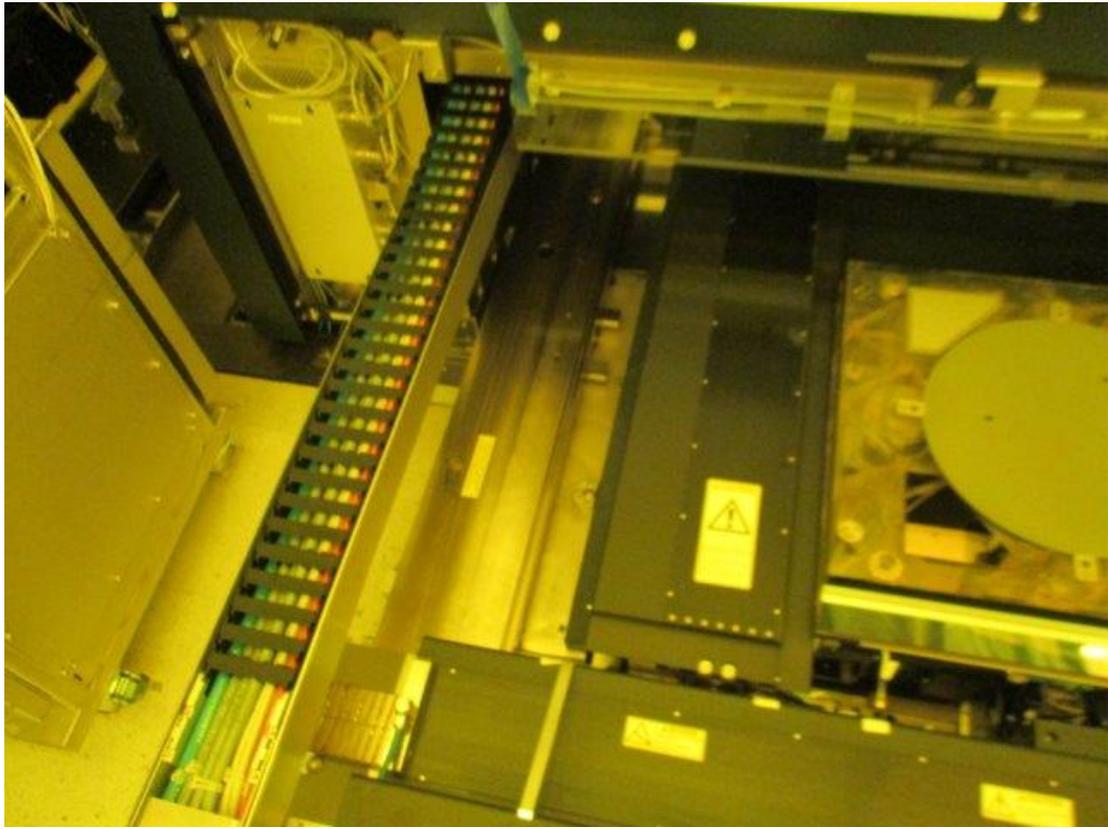

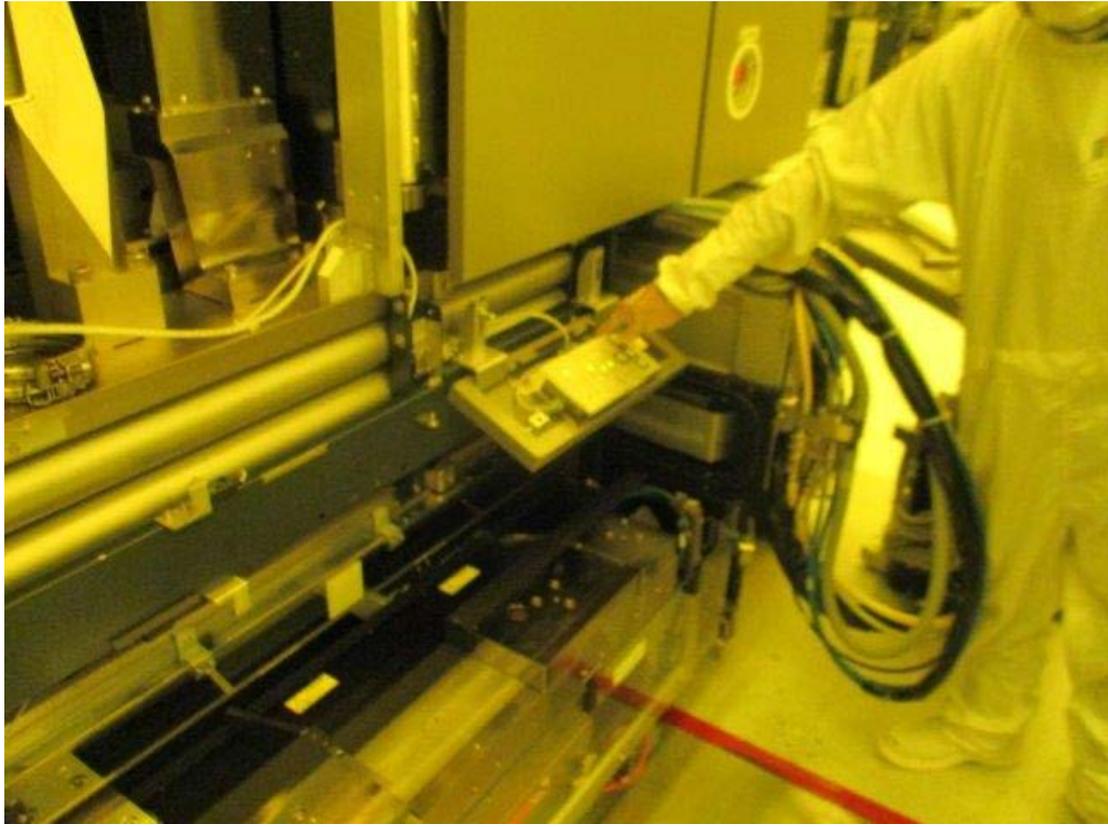


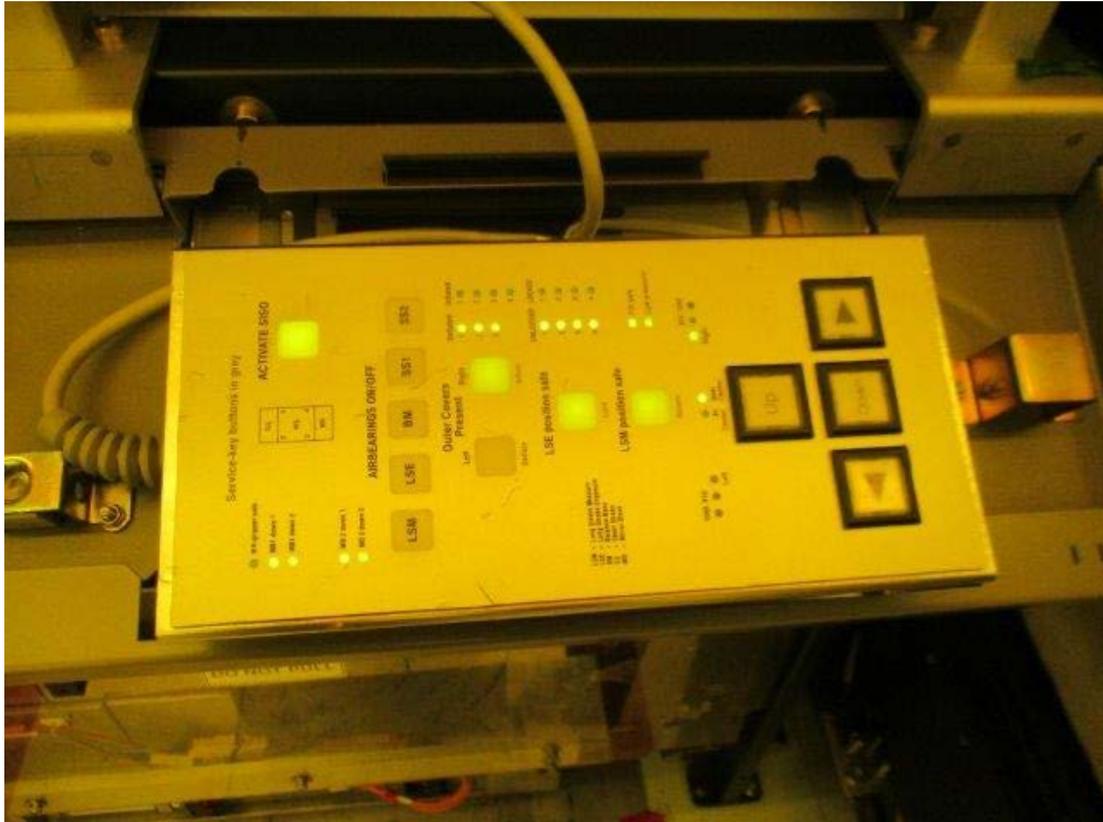







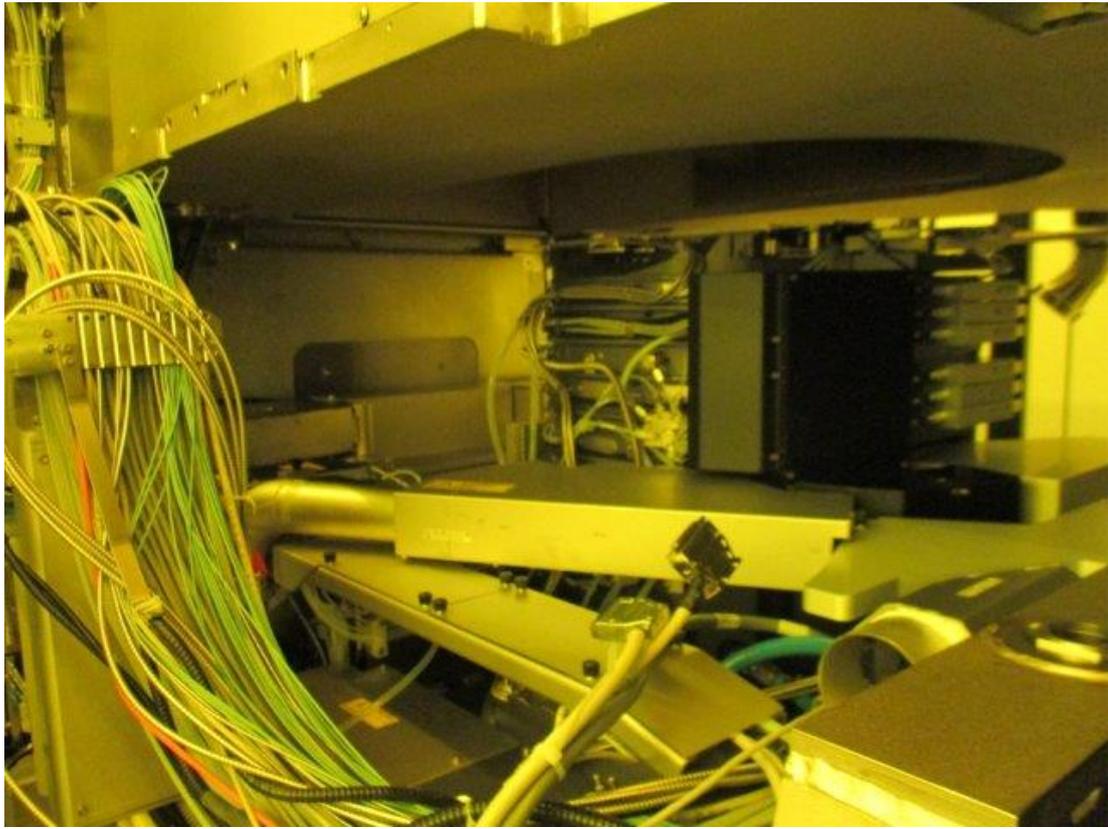





















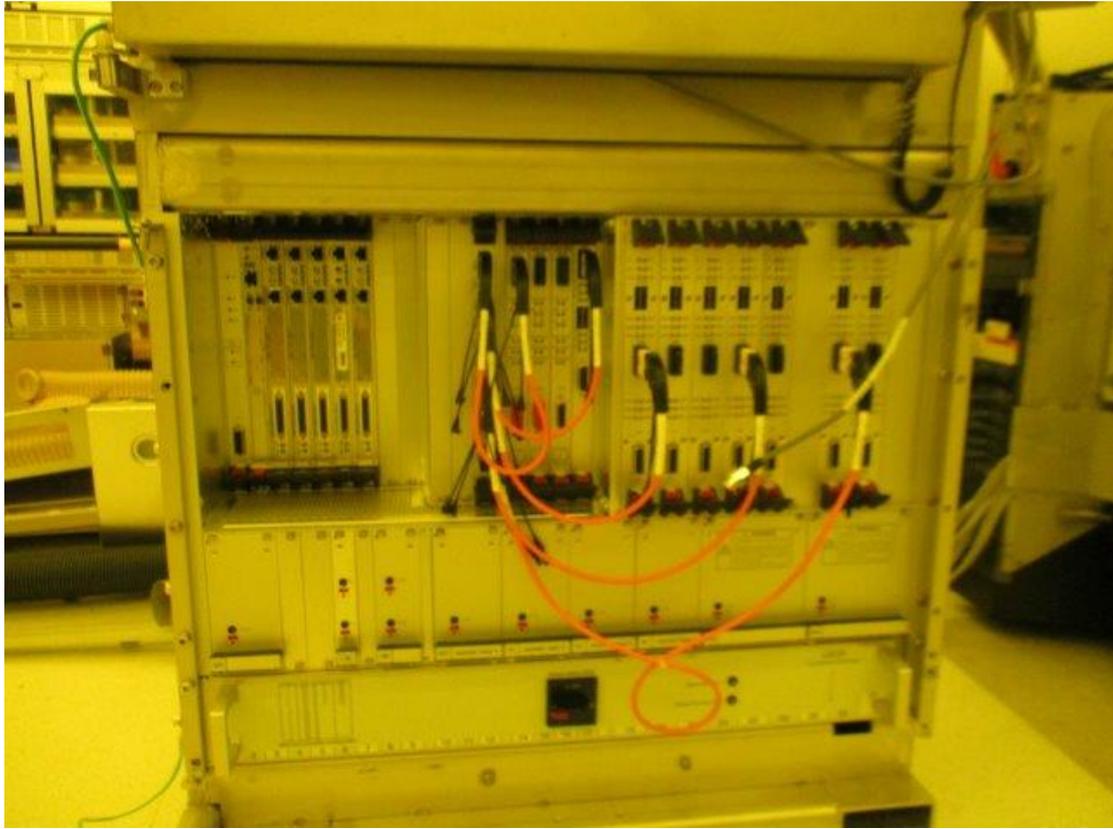





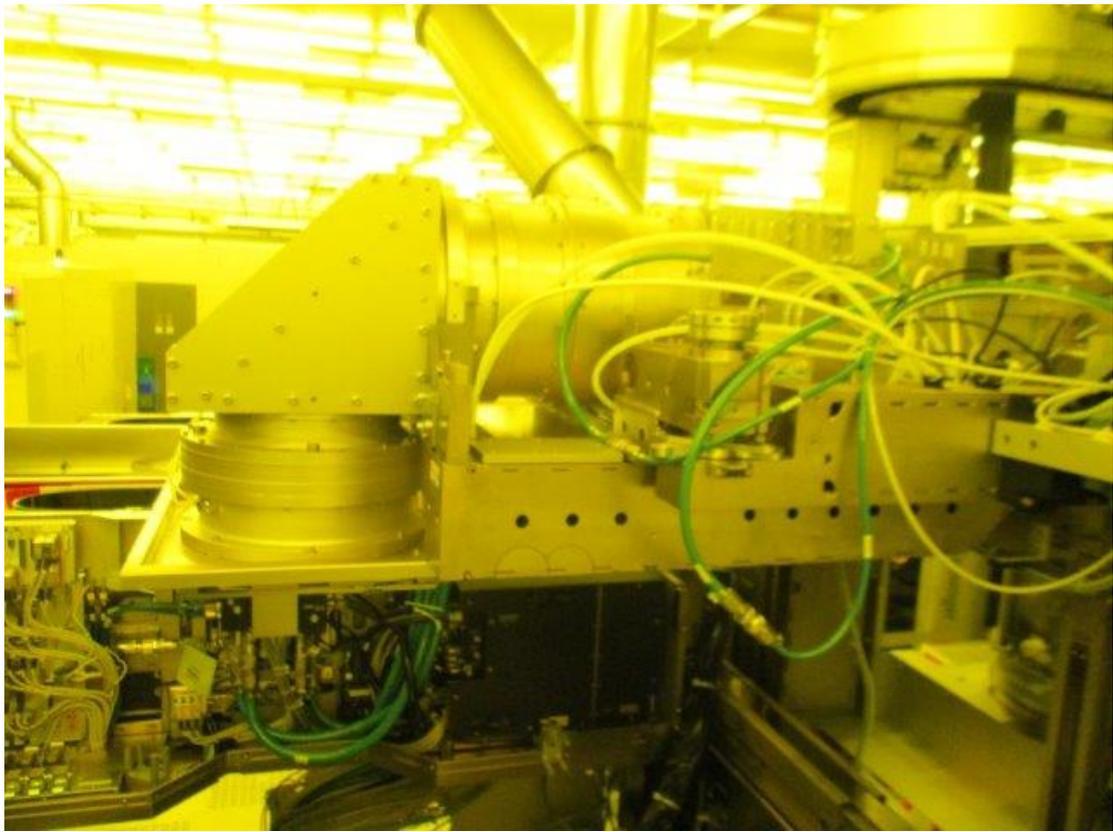






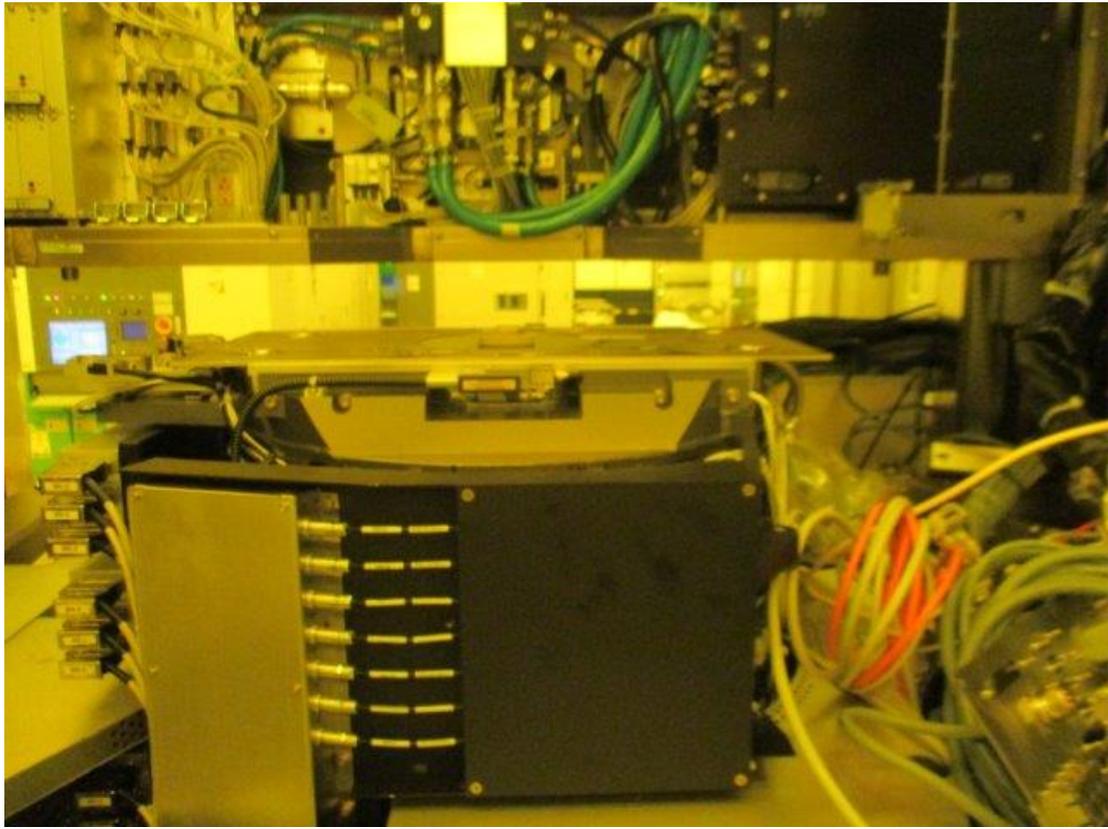


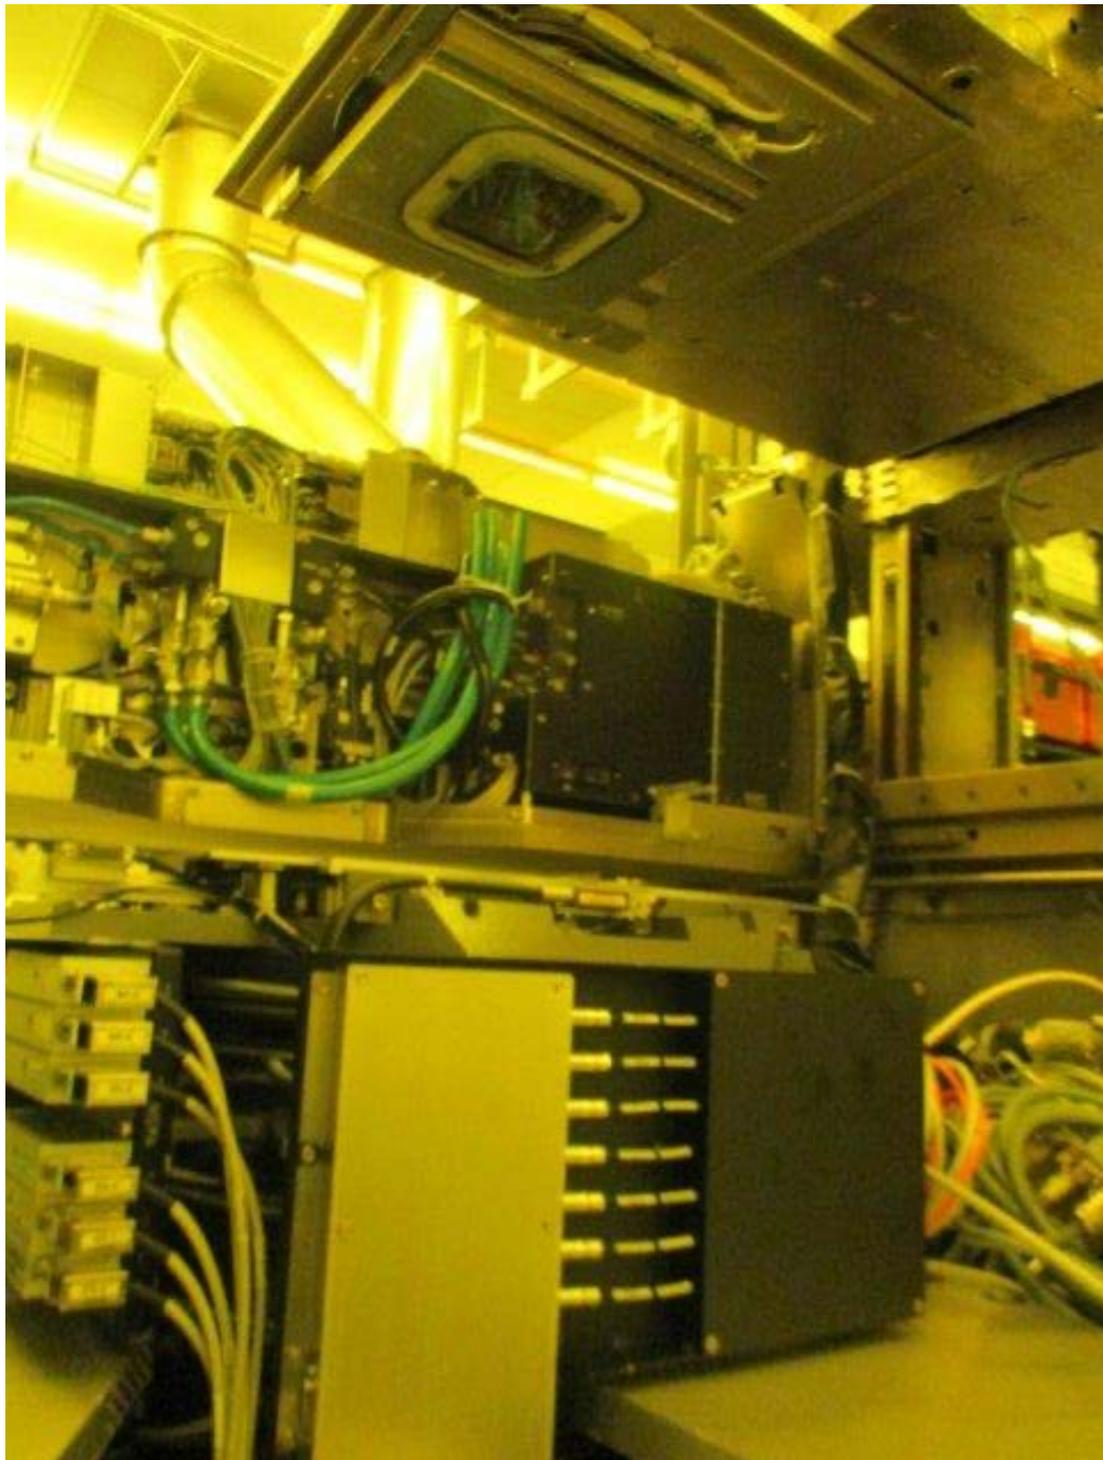







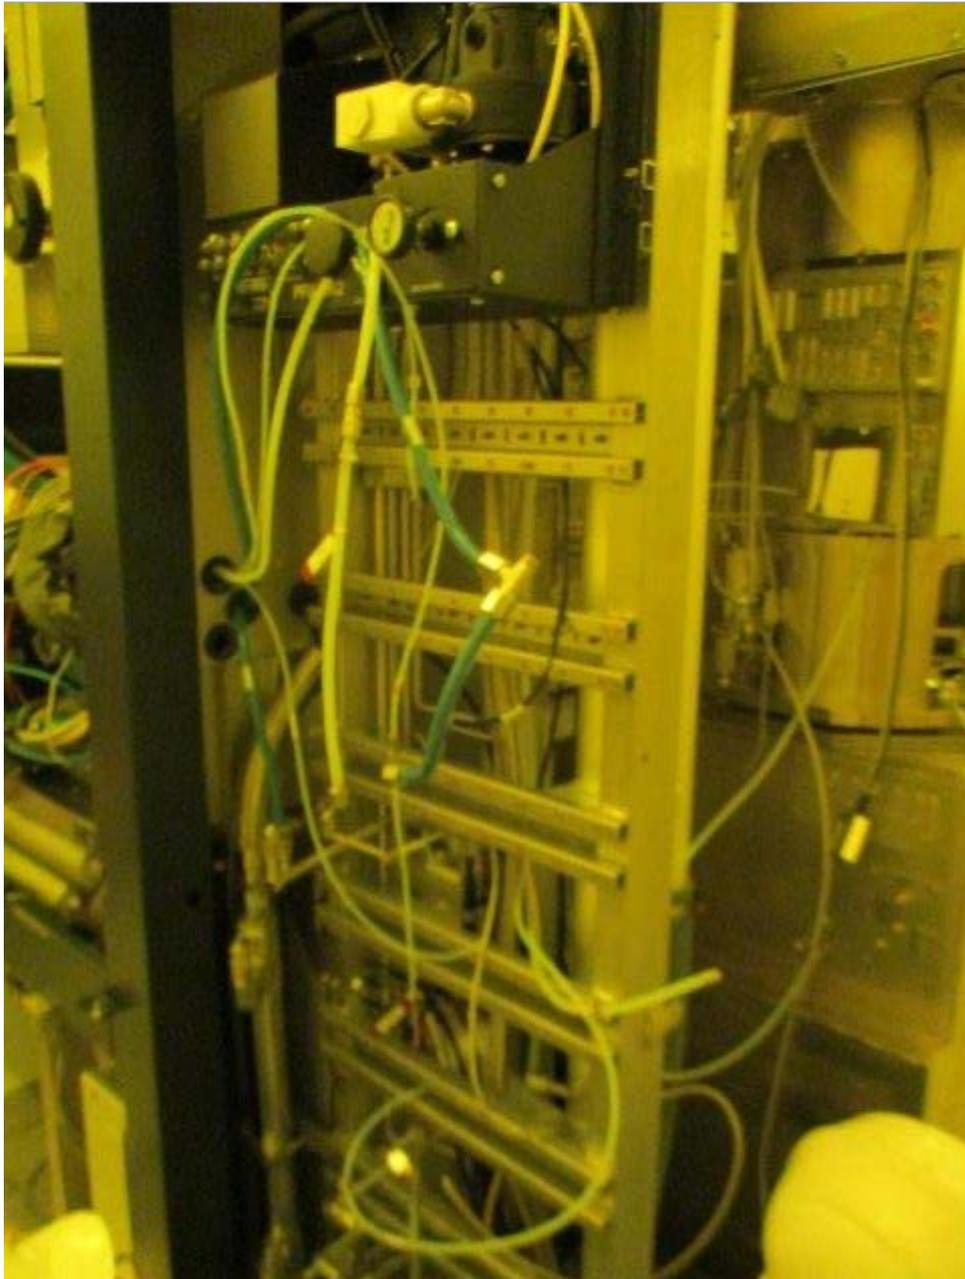

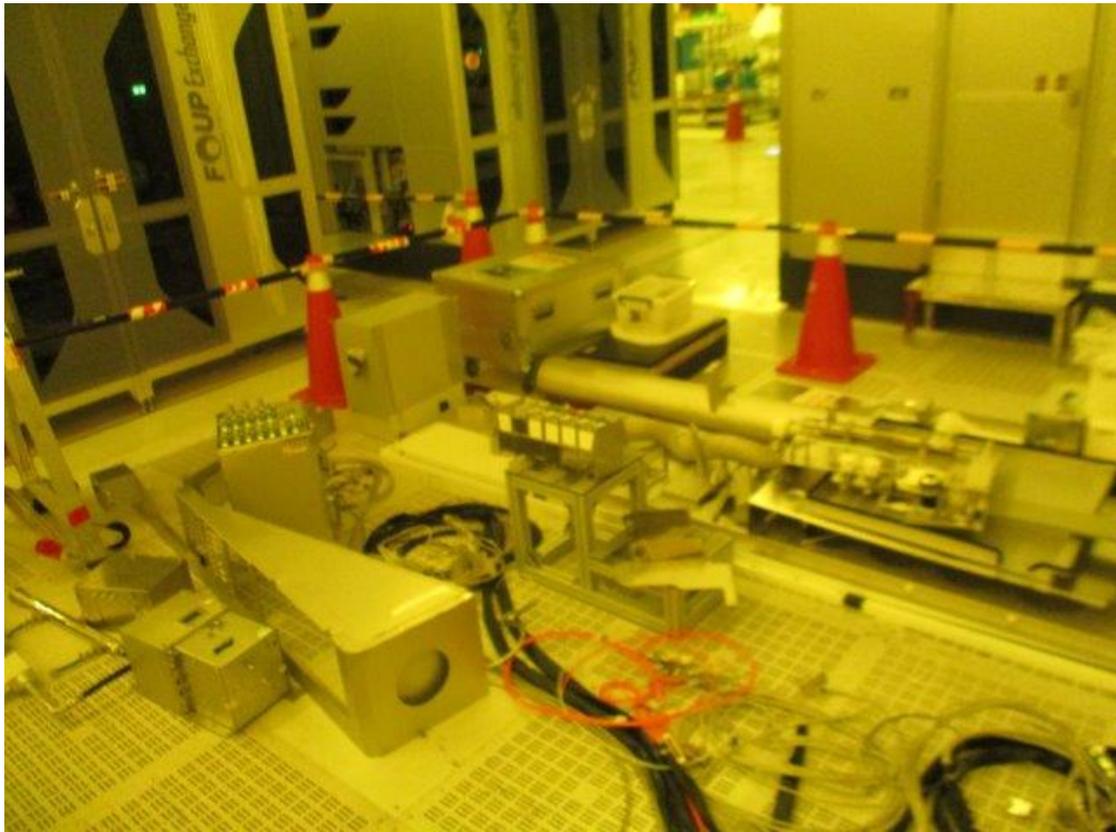




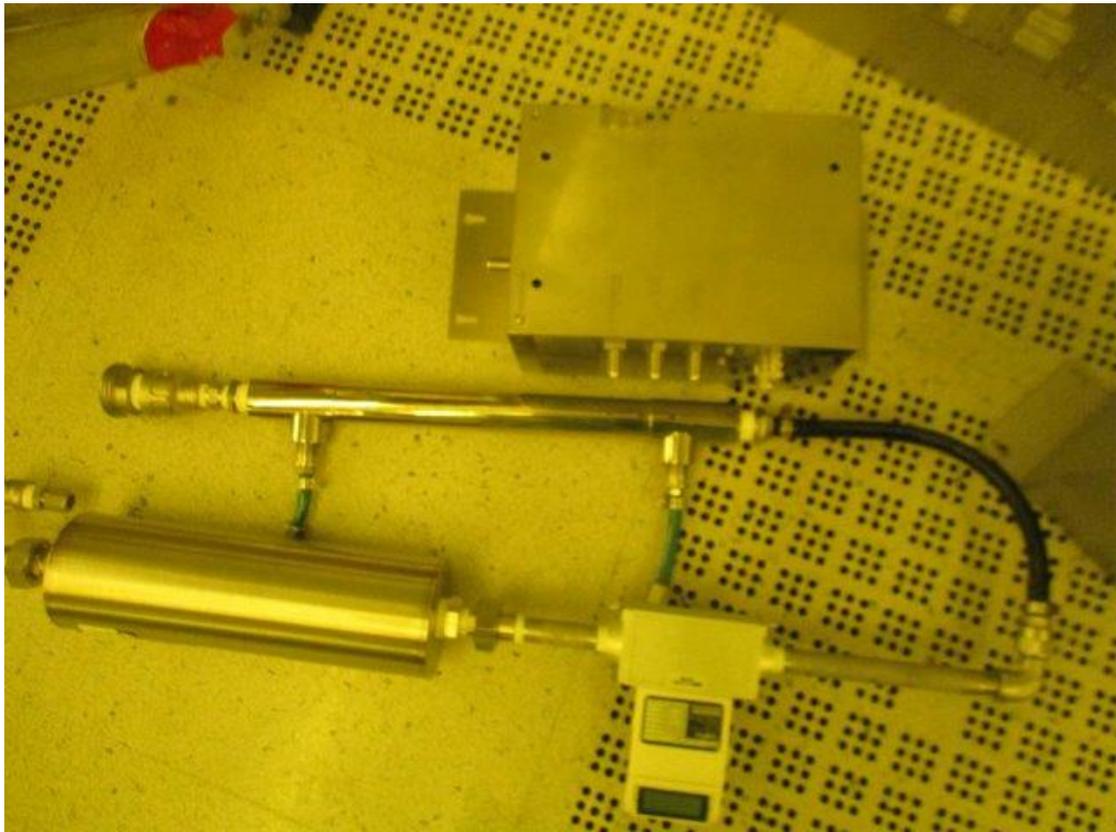


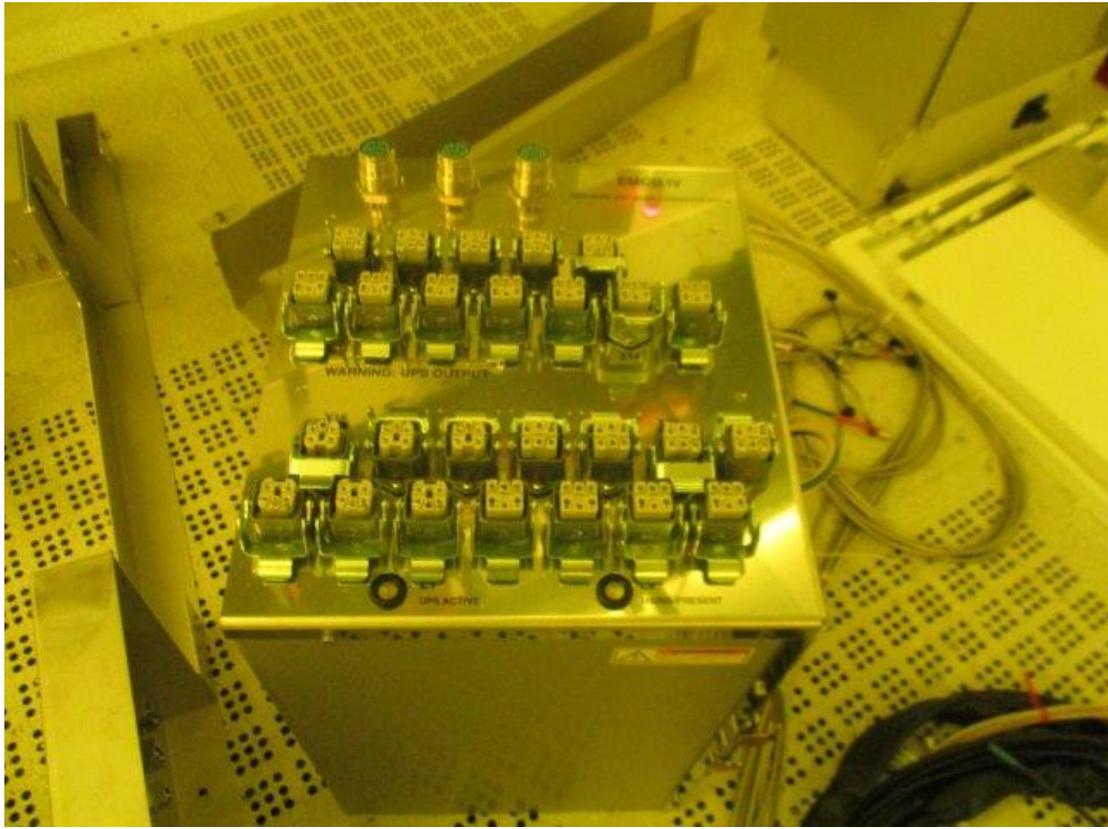





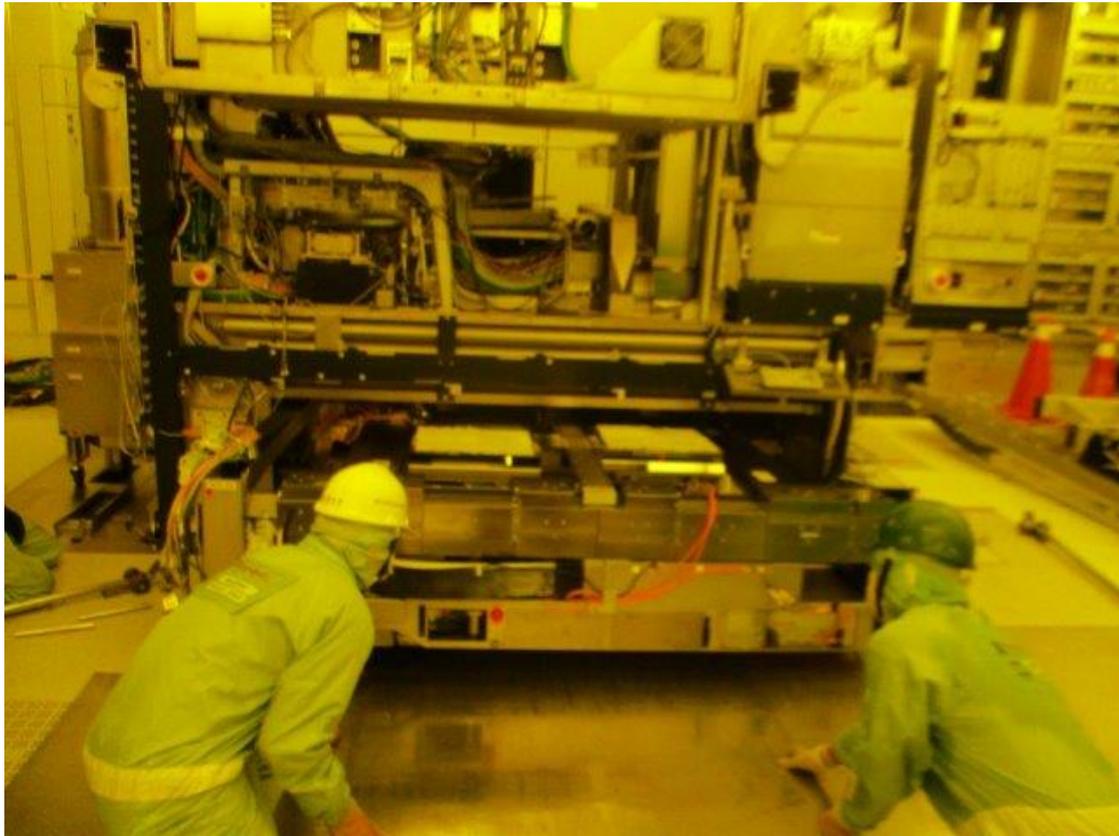





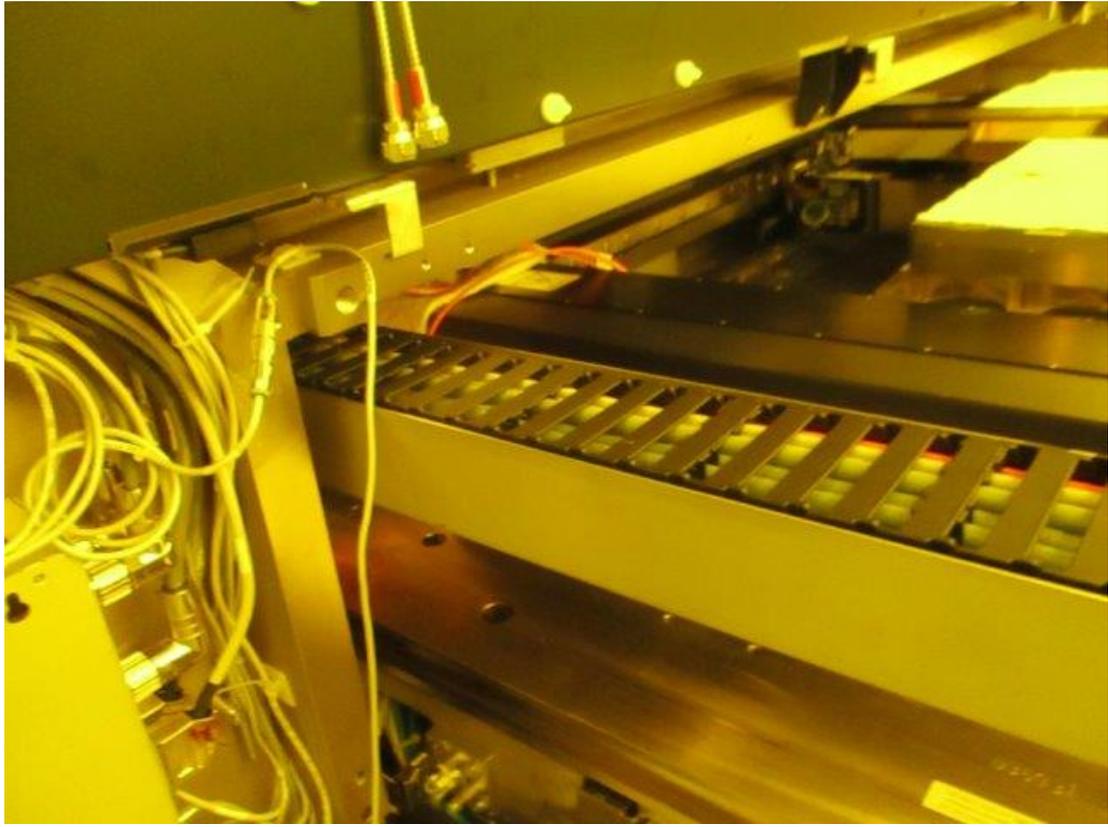

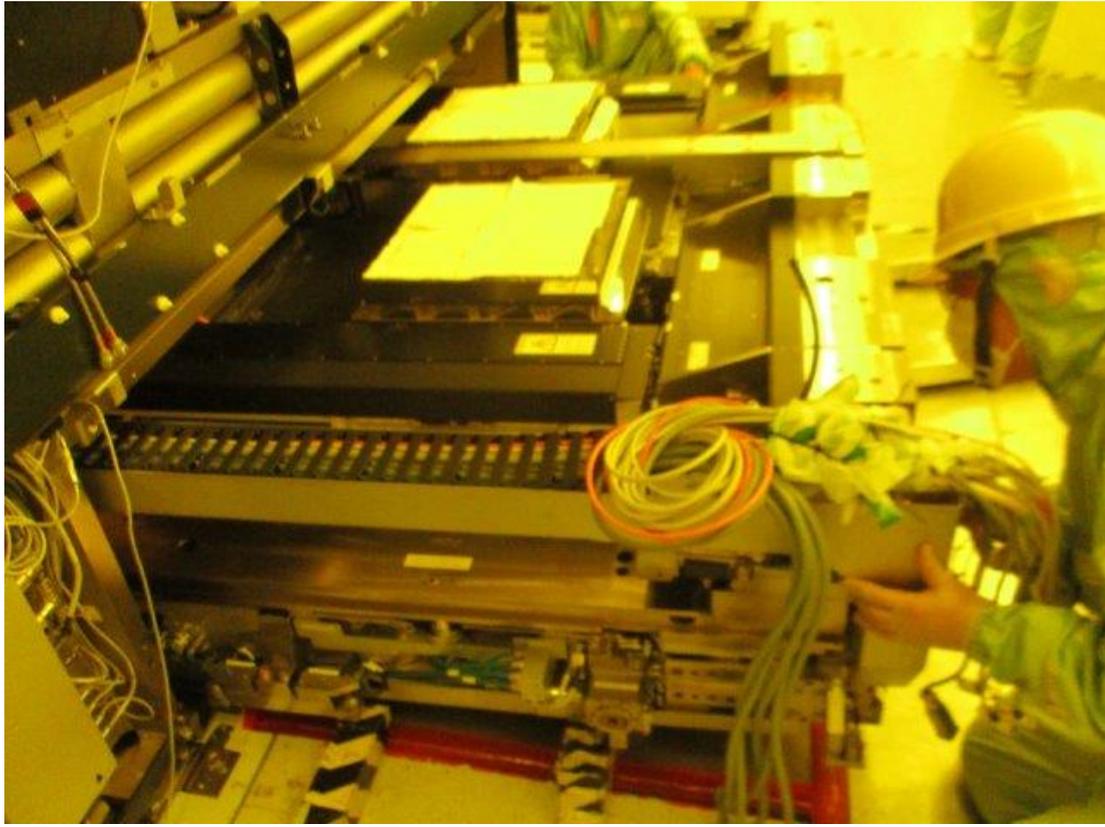

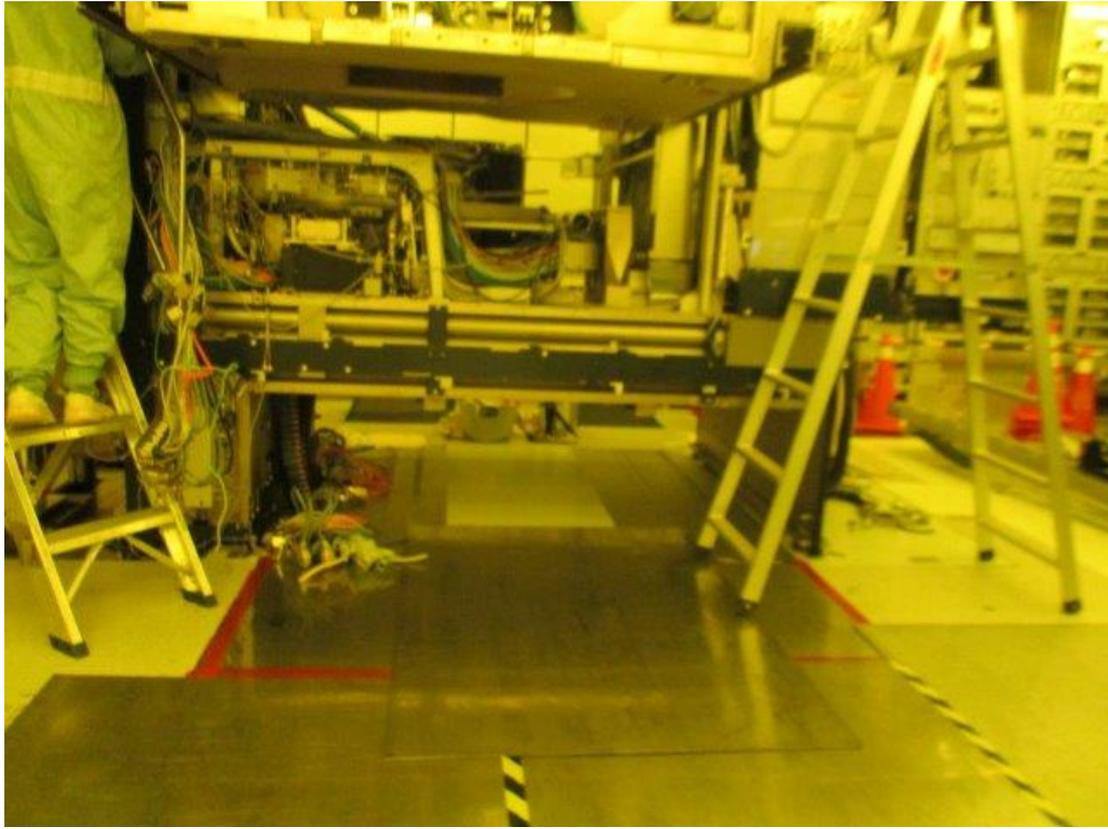

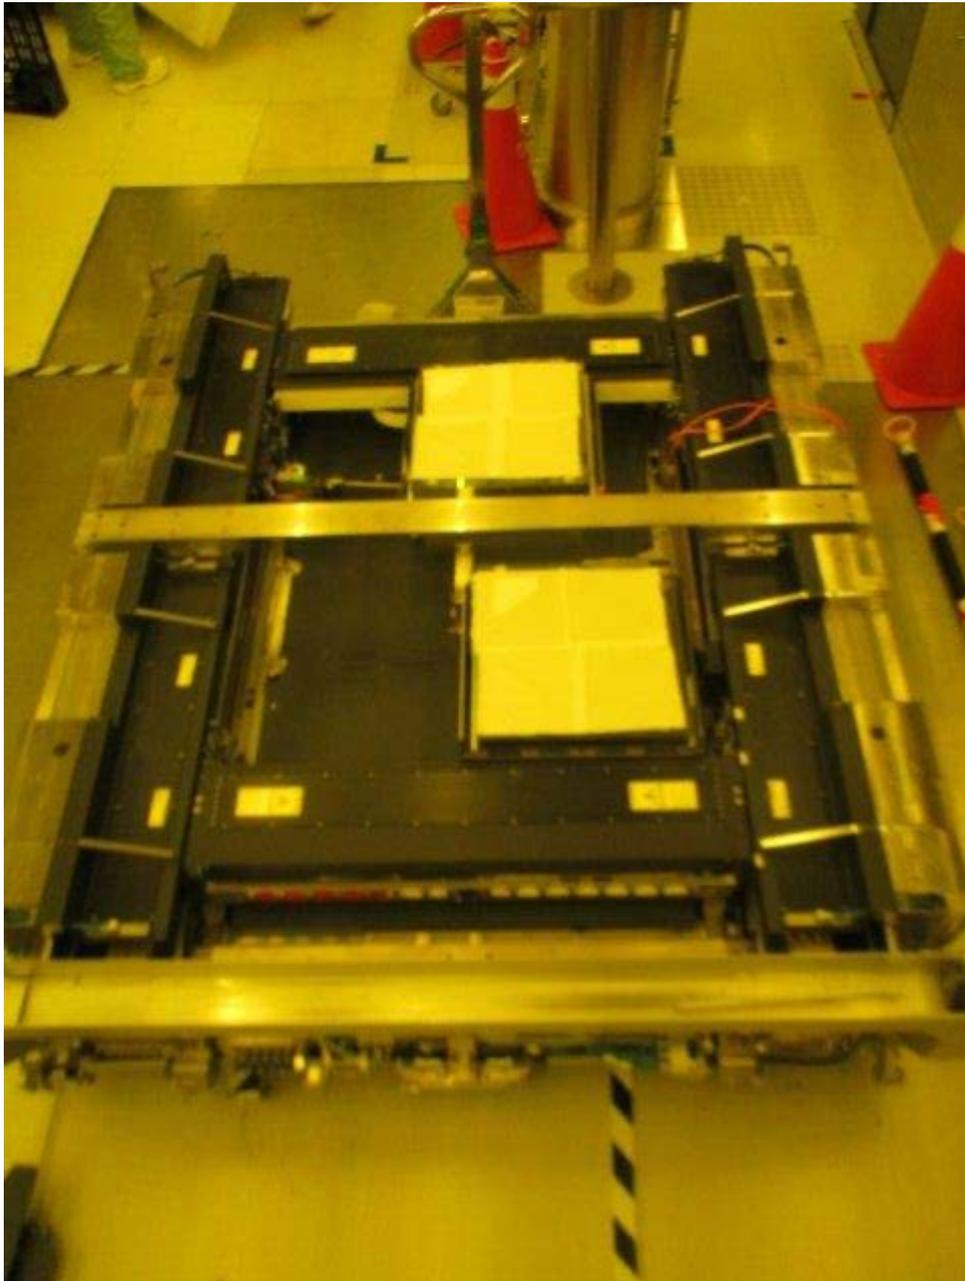


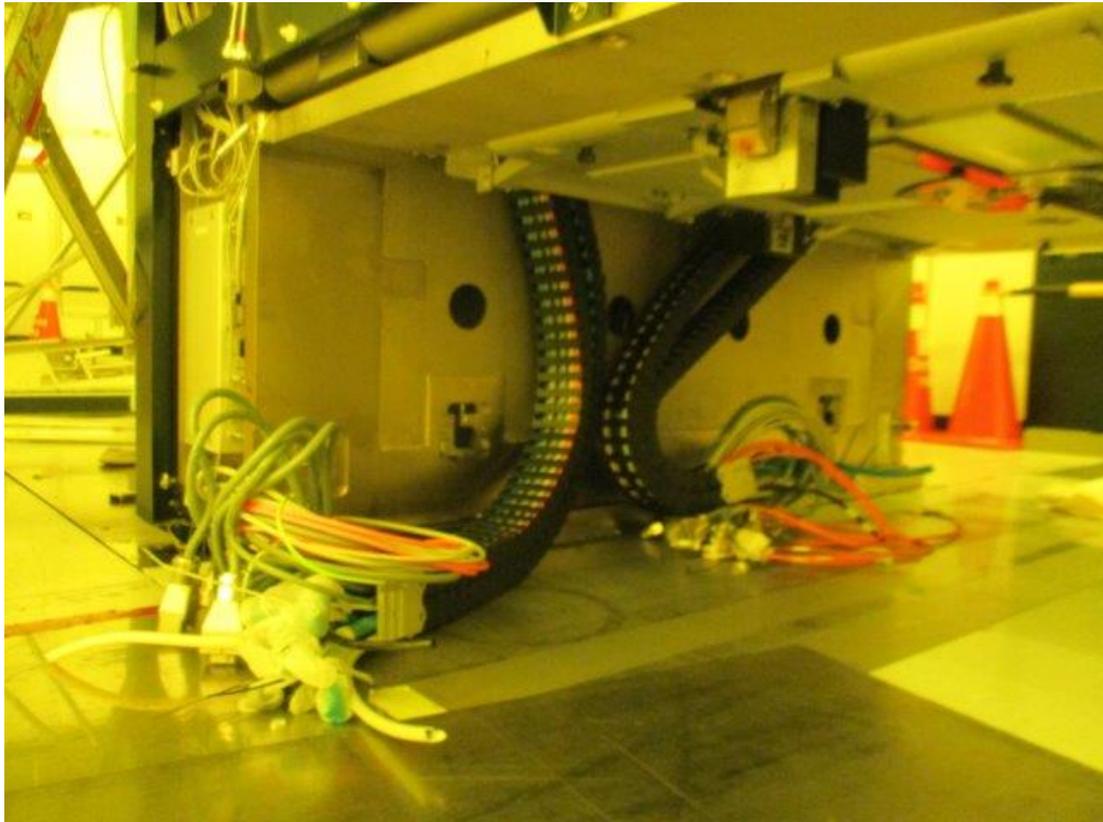







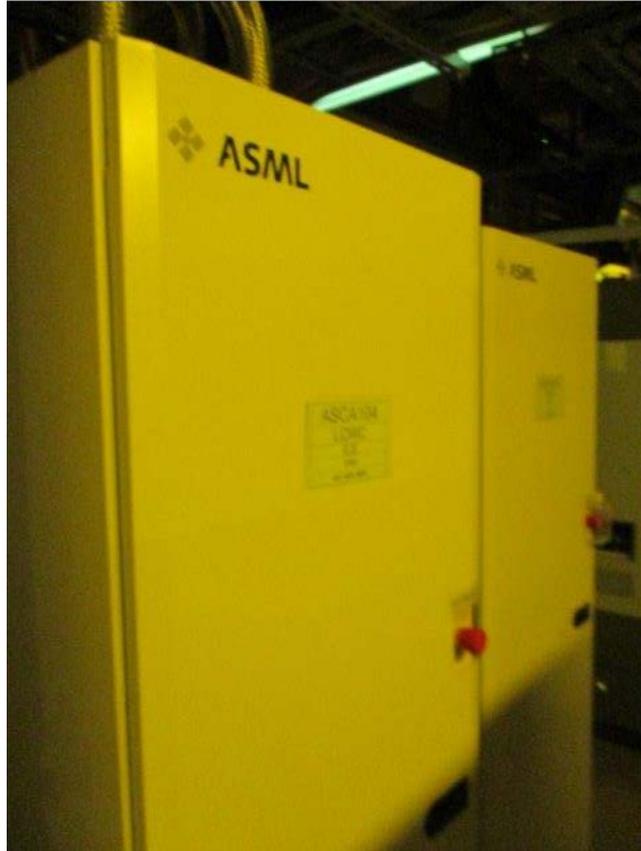









機 型	Type	冷 媒	Refrigerant Type
冷 却 能 力	45000 KCAL/H	設 計 壓 力	H: 2.2 MPa L: 1.6 MPa
電 源	208 V 3 φ 50 Hz	試 驗 壓 力	H: 1.6 MPa L: 1.2 MPa
消 耗 電 功 率	45 kw	製 造 日 期	2004.10
能 源 效 率 比 值	KCAL/wh	製 造 號 碼	J0357
運 轉 電 流	117 A	機 械 重 量	1860 kg

上將冷凍空調股份有限公司
SHAN-JUNG AIR-CONDITIONING CO., LTD.
TEL: (02) 2885-6145 FAX: (02) 2885-8188













AERONEX®
INFINITY™ GPS-8 Z SERIES

PART NUMBER	GPS8ZAT
MAX OPER PRESSURE	17 barg (1.72 MPa) (250 psig)
MAX DIFF PRESSURE	13 bar (1.38 MPa) (200 psi)
OPERATING TEMP	15-40°C (59-104°F)
NOMINAL FLOW	300 slm
FILTRATION	0.003 micron
POWER REQUIREMENTS	200-240 VAC@1000 Watts, 50-60 Hz

Static pressure inside the cabinet must be 0.1-0.15 in WC.
MINIMIZE EXPOSURE TO ATMOSPHERE

CE 0035 FOR USE ONLY WITH: CDA (AIR) Yr. of Mfr.: 2004

Mykrolis Corporation, Billerica, MA 01821 +1-858-452-0124
www.mykrolis.com US Patent 6,381,888

Mykrolis™
In case of accidental media release, refer to product manual for plumbing P&ID and MSDS



WFZF990006



